




Turbokompresora markēšana

Sealing of the turcompressor

Pielikums Nr. 7

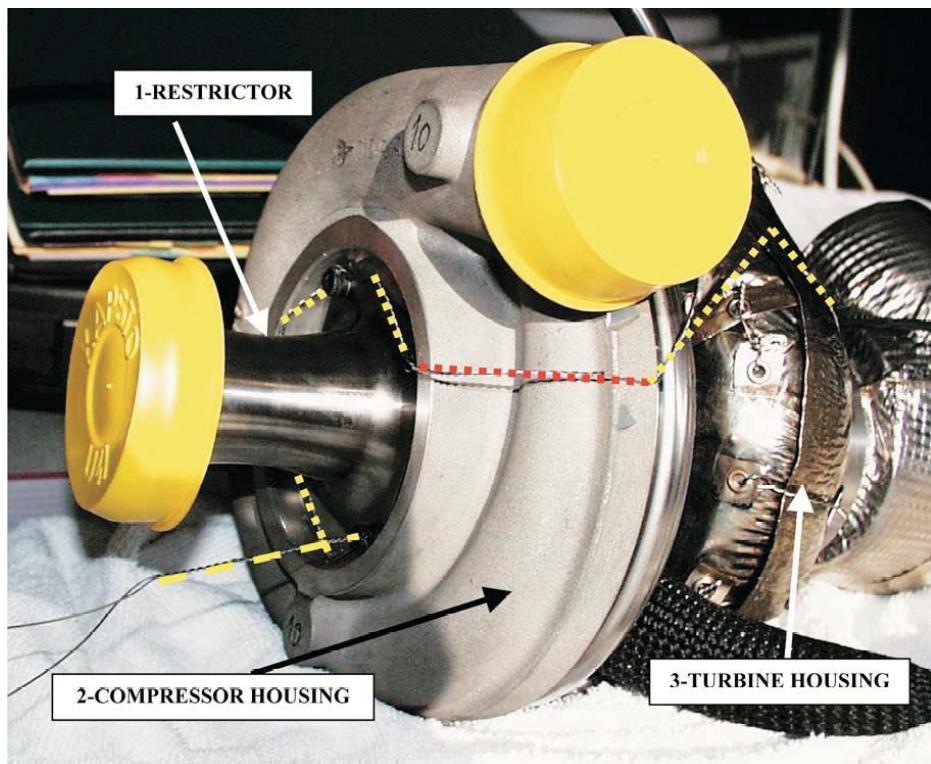

Restruktoram jābūt izgatavotam no viendabiga materiala un to jāparedz caururbt tikai montāžai un plombešanai, kas javeic starp montešanas skruvem, starp restruktoru (vai restruktora/kompresora korpusa stiprinajumiem), kompresora korpusu (vai korpusa/atloka stiprinajumu) un turbinas korpusu(vai korpusa/atloka stiprinajumu) skatit zimejumu.

The restrictor must be made from a single material and may be pierced solely for the purpose of mounting and sealing, which must be carried out between the mounting screws, between the restrictor (or the restrictor / compressor housing attachment), the compressor housing (or the housing /flange attachment) and the turbine housing (or the housing/flange attachment) see drawing.